


FOR USE AS AN INSULATION OVERLAYMENT -- NOT RECOMMENDED FOR DIRECT APPLICATION OVER EXISTING MEMBRANE.

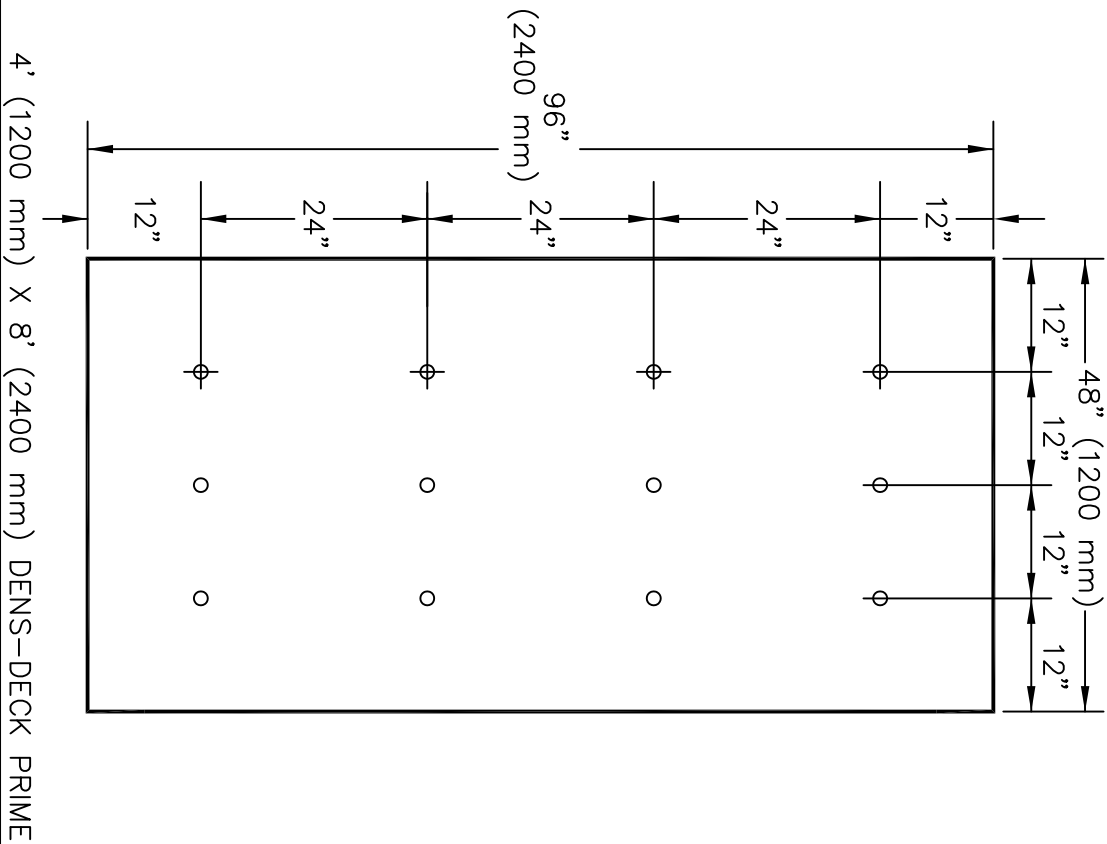

NOTES:

1. IF A FACTORY MUTUAL (FM) RATING IS NOT REQUIRED, THE FOLLOWING TOLERANCE ON DIMENSIONS BETWEEN FASTENERS ARE PERMITTED.

DIMENSIONS SHOWN ON DRAWING	PERMITTED TOLERANCES
6" (150 mm)	± 1/2" (13 mm)
12" (300 mm)	± 1" (25 mm)
18" (500 mm)	± 1-1/2" (40 mm)
24" (600 mm)	± 2" (50 mm)

2. JOINTS IN DENS-DECK PRIME MUST BE STAGGERED WITH JOINTS IN INSULATION BELOW (IF SPECIFIED).

WFA-27.7

1/4" OR 1/2" THICK DENS-DECK PRIME ATTACHMENT

WEATHERBONDTM

©2009 WEATHERBOND