

WeatherBond **POLYISO**

Pre-Cut Hips and Valleys for Tapered Polyiso Systems



Ready to install, Pre-cut Hips and Valleys designed specifically for four-way tapered polyiso installations.

Pre-cut Hips (slope outward) and Pre-cut Valleys (slope inward) are factory produced using two 4' x 4' panels of Tapered XP, or Tapered XFP, and then cut in half at a 45-degree angle. Only the two halves that you need are shipped.


Features and Benefits

- Labor savings - no field cuts required
- No waste, reducing material removal fees on jobsite
- Individually packaged and labeled
- Custom-designed to meet your jobsite requirements including slope, minimum and maximum thickness

Available in Slopes:

- 1/8" (2 mm)
- 1/4" (6 mm)
- 3/8" (3 mm)
- 1/2" (12 mm)
- 5/8" (10 mm)
- 3/4" (5 mm)


Valley Field Fabrication

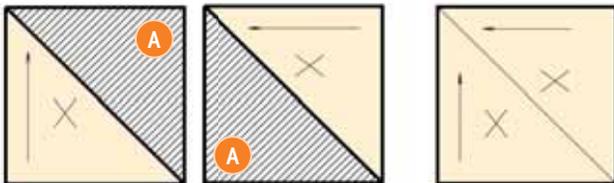

Discard Piece **A** for Valley Fabrication

Completed Valley

Hip Field Fabrication

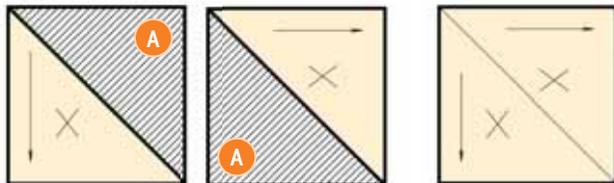

Discard Piece **A** for Hip Fabrication

Completed Hip

Project Specifications

Roof Area 401 squares Tapered Insulation Slope 1/4" per foot; 1/2" minimum at drains			
Field Fabricated Hips and Valleys		Pre-Cut Hips and Valleys	
Tapered Quote	\$72,800	Tapered Quote	\$72,800
Hoist, stage and move 1/2 truck of additional waste (3 man-hours*)	\$150	Additional cost for Pre-Cut Hips and Valleys	\$2,800
Labor to cut 1 truck of tapered materials (84 man-hours*)	\$4,200		
Waste Removal Cost: 50 cubic yards	\$1,100		
	\$5,450		
TOTAL COST: \$78,250		TOTAL COST: \$75,600	

Savings from using Pre-Cut Hips and Valleys: \$2,650

*Man-hours calculated at \$50.00



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

P.O. Box 251 | Plainfield, PA 17081 | 866.471.5125 | FAX: 717.960.4034 | www.weatherbondroofing.com

© 2018 WeatherBond. 01.16.18 REPRINT REQUEST CODE: 610405 - "WeatherBond Pre-Cut Hips and Valleys Sell Sheet"
WeatherBond is a trademark of WeatherBond.