


ALLOW 1/4" MIN. TO 1/2" MAX. (6 TO 13 mm) SPACING BETWEEN CONSECUTIVE LENGTHS OF TERMINATION BAR.

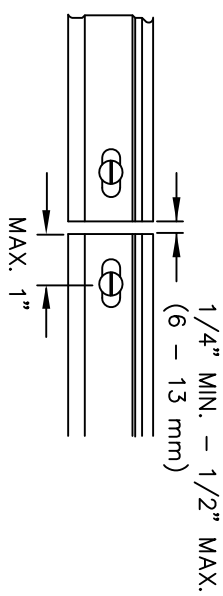

- NOTES:
1. APPLY ON HARD SMOOTH SURFACE ONLY; NOT FOR USE ON EXPOSED WOOD.
  2. WATER CUT-OFF MASTIC MUST BE HELD UNDER CONSTANT COMPRESSION.
  3. DO NOT WRAP COMPRESSION TERMINATION AROUND CORNERS.

WFC-9.8

COUNTERFLASHING TERMINATION

**WEATHERBOND™**

©2009 WEATHERBOND