



4' (1200 mm) x 8' (2400 mm) INSULATION BOARDS

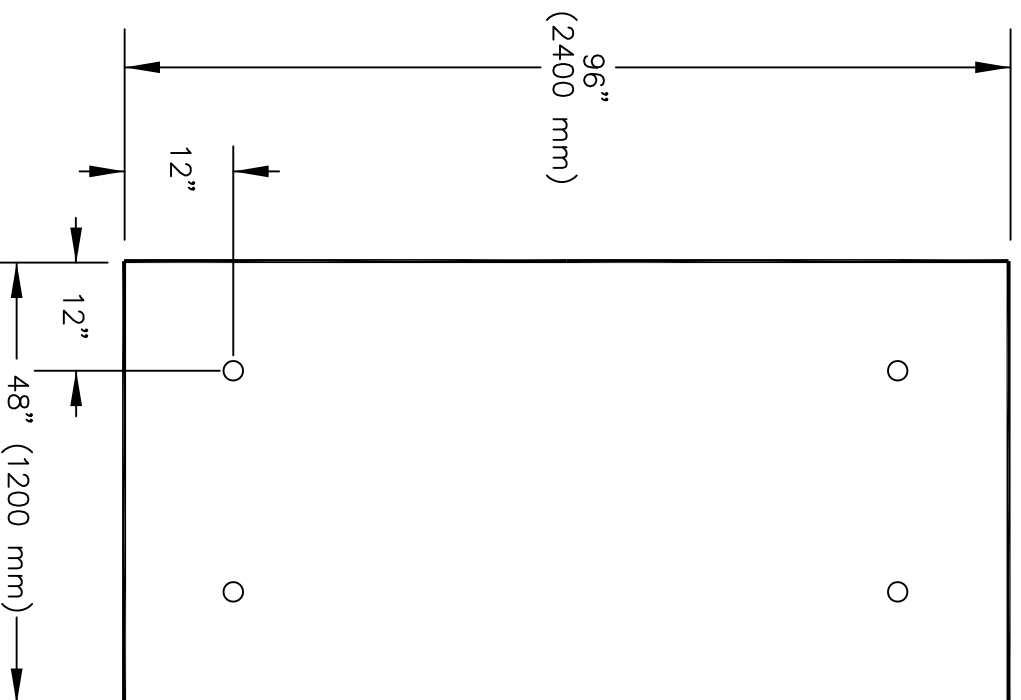

INSULATION FASTENING PATTERN NOT FOR USE WITH DURAPINK INSULATION, REFER TO DETAIL WFMA27.3

4' (1200 mm) x 4' (1200 mm) INSULATION BOARDS

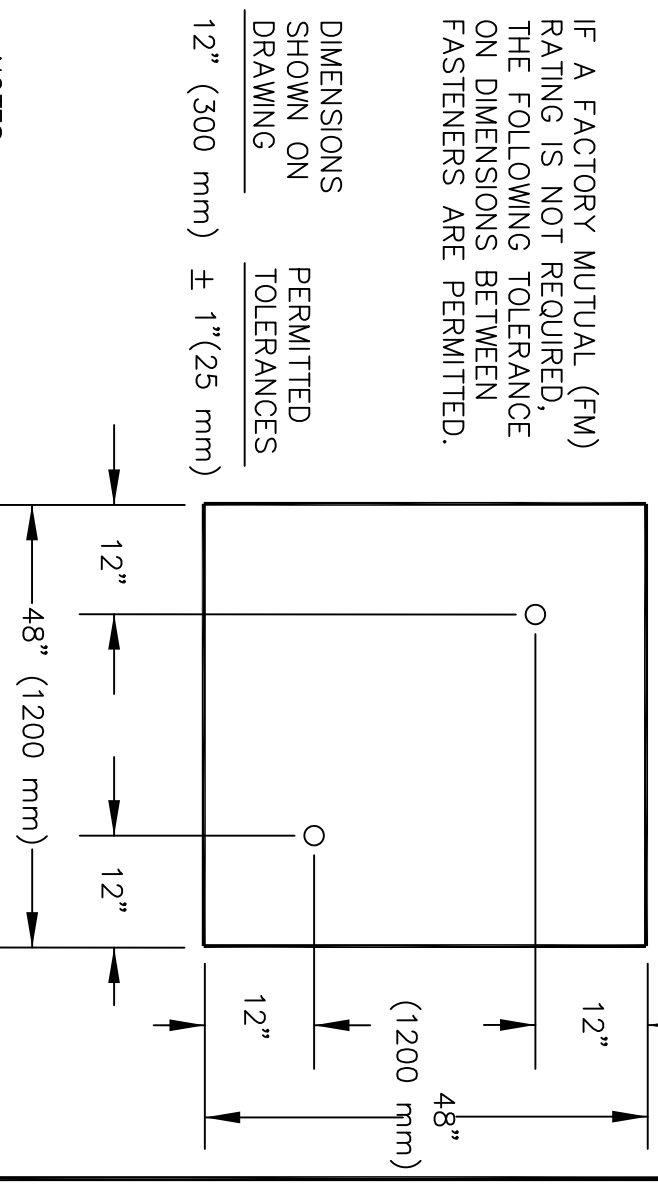

IF A FACTORY MUTUAL (FM) RATING IS NOT REQUIRED, THE FOLLOWING TOLERANCE ON DIMENSIONS BETWEEN FASTENERS ARE PERMITTED.

DIMENSIONS SHOWN ON DRAWING	PERMITTED TOLERANCES
12" (300 mm)	± 1" (25 mm)

NOTES:

1. FOR CRITERIA ON INSULATION FASTENERS AND PLATES, SEE SPECIFICATIONS.
2. SEAM FASTENING PLATES MAY BE USED IN LIEU OF INSULATION FASTENING PLATES FOR INSULATION ATTACHMENT ON THIS SYSTEM ONLY.
3. WHEN POLYISOCYANURATE INSULATION (BY OTHERS) WITH A THICKNESS LESS THAN 1.5" (40 mm) IS INSTALLED OVER AN EXISTING ROOFING MEMBRANE WITHOUT A TEAROFF, REFER TO DETAIL WFMA-27.2 FOR FASTENING REQUIREMENTS.

WFMA-27.1 MECHANICAL ATTACHMENT
INSULATION/UNDERLAYMENT OR 1/2" (13 mm) THICK DENS-DECK

WEATHERBOND™

©2009 WEATHERBOND