


NOTES:

1. REMOVE ALL GRAVEL AT TIE-IN.
2. ON MECHANICALLY ATTACHED SYSTEMS, APPROVED CONCRETE FASTENERS AND HPWX PLATES ARE REQUIRED OVER CONCRETE DECKS.
3. WATER CUT-OFF MUST BE HELD UNDER CONSTANT COMPRESSION.
4. WEATHERBOND IS NOT RESPONSIBLE FOR DAMAGE TO THE BUILT-UP ROOF OR STRUCTURAL DECK RESULTING FROM PONDED WATER; THIS DETAIL APPLIES TO RE-ROOFING WHEN A TEAR-OFF IS NOT SPECIFIED AND WAS DESIGNED TO PREVENT MIGRATION OF WATER WITHIN THE ROOFING SYSTEM.

DIMENSIONS	mm	
(A)	6"	152 MIN.
(B)	2"	51 ± 1/2" (13mm)

TPO ONLY
(NOT FOR PVC)

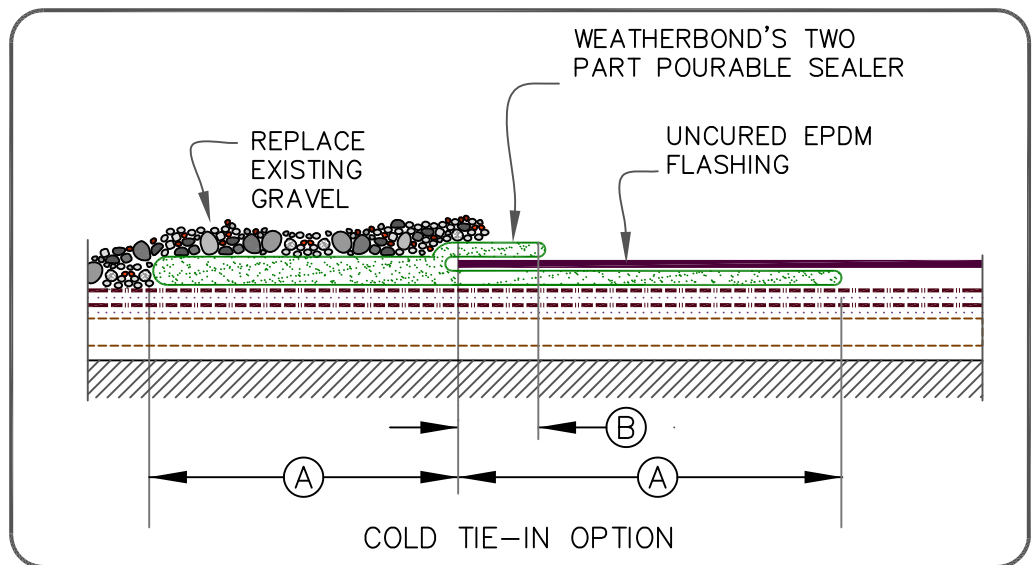

TPO TIE-IN TO BUILT-UP ROOFING OVER CONCRETE ROOF DECK

- TPO MEMBRANE
- APPROVED SUBSTRATE
- 0 SEE NOTE

THERMOPLASTIC ROOFING SYSTEM

WBPC-13.2