


NOTES:

1. FASTEN COATED METAL FLASHING TO WOOD NAILERS USING 1-1/2" (38mm) MIN. RING SHANK NAILS SPACED 6" (152mm) ON CENTER AND STAGGERED APPROX. 1/2" (13mm).
2. APPROXIMATELY 1/8" (3MM) DIAMETER BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF WEATHERBOND REINFORCED TPO MEMBRANE AND RECOMMENDED ON CUT EDGES OF WEATHERBOND PVC MEMBRANE.



INSIDE CORNER WITH COATED METAL WALL FLASHING

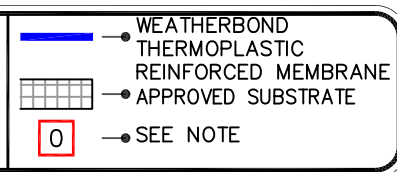

THERMOPLASTIC ROOFING SYSTEM  
WBPC-15.3