
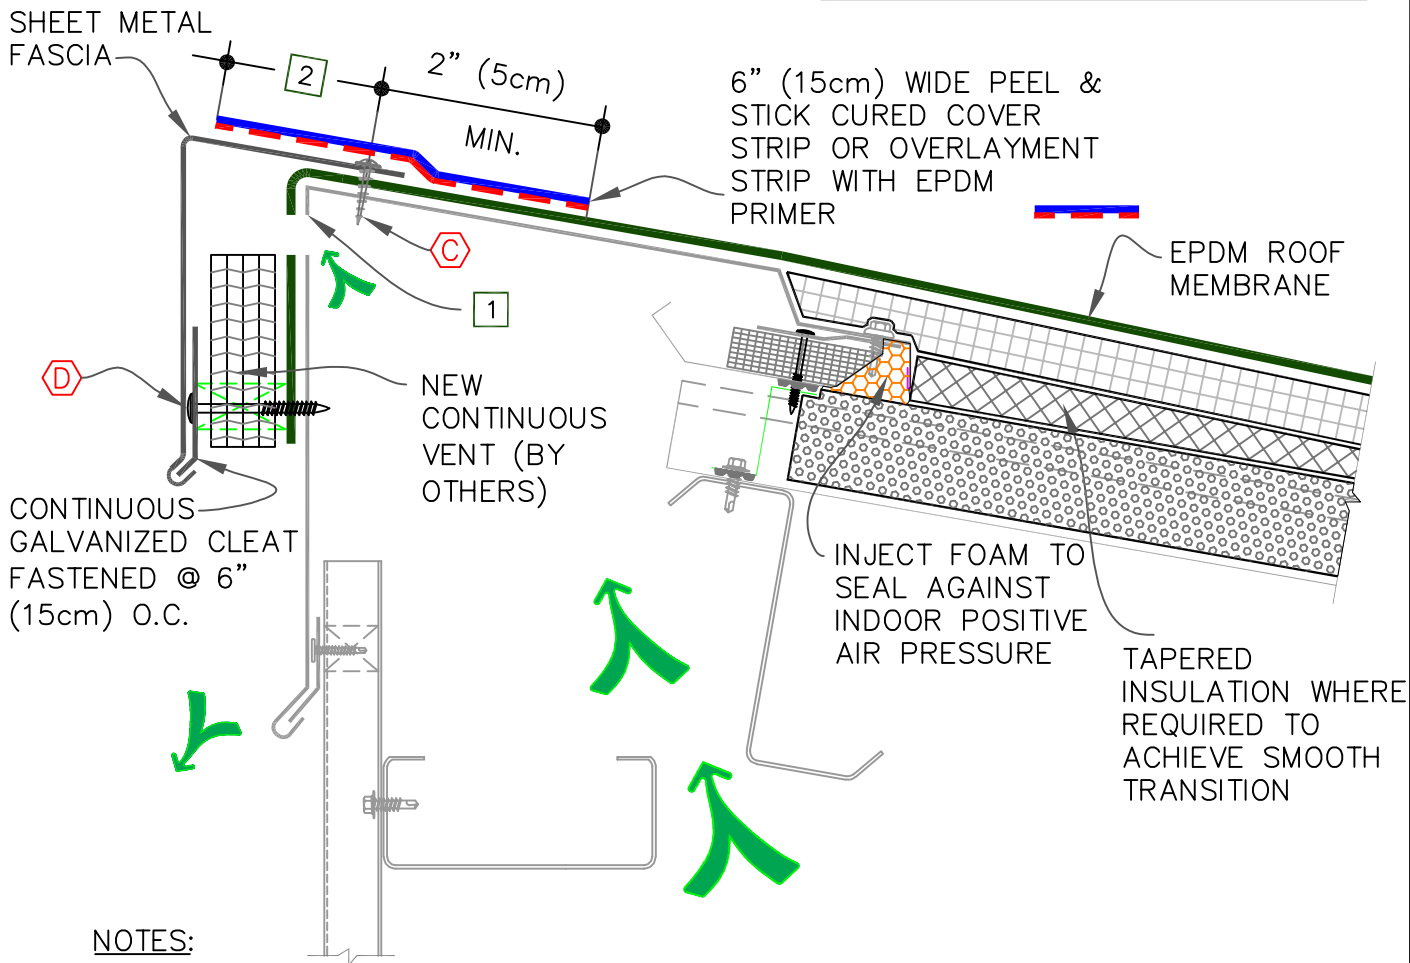


**C** SHEET METAL SCREWS @ 6" O.C., MAX., EXPOSED 3/4" (2cm) MIN. BEYOND EXISTING SHEET METAL SUBSTRATE

**D** FASTENERS TO MATCH EXISTING @ 6" O.C., MAX., EXPOSED 3/4" (2cm) MIN. BEYOND EXISTING SUBSTRATE

EXISTING HIGH-END VENTED ROOF EDGE

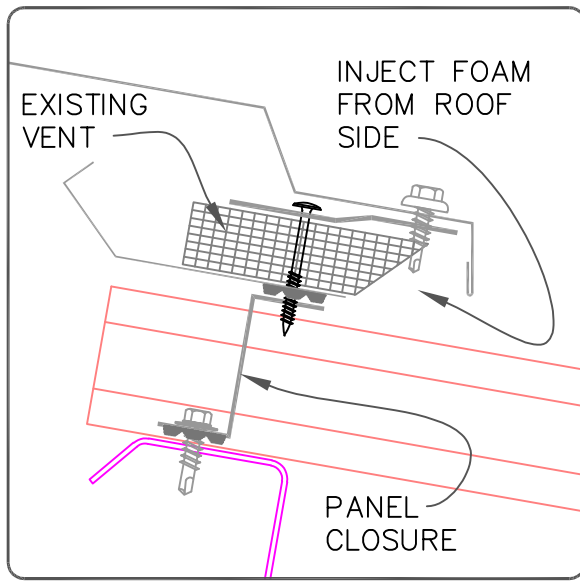

**NOTES:**

1. CUT HOLES IN EXISTING HIGH EAVE TRIM AT TOP TO REDIRECT VENTING. DESIGNER TO CALCULATE THE SIZES, FREQUENCY OF HOLES WITHOUT WEAKENING THE SHEET METAL.
2. DECK FLANGE MUST BE TOTALLY COVERED, MINIMUM 2" (5cm) COVERAGE PAST FASTENER HEAD.



HIGH-END VENTED ROOF EDGE

	● HIGH DENSITY RECOVER BOARD
	● IN-FILL INSULATION
<b>A</b>	● SEE NOTE(S)
<b>0</b>	

METAL RETROFIT  
MR | E1.7