



NOTES:

1. REFER TO **TABLES ON SHEETS ATTACHMENT 1-2** FOR DETAILED INSPECTION, CLEANING AND PRIMING FOR DIFFERENT MATERIALS WITHIN THE FLASHING AREAS.
2. IF FLUTES ARE PERPENDICULAR DRILL A 3/8" (1cm) WEEP HOLE IN THE BOTTOM FLUTES OF THE STEEL DECK ALONG THE TIE IN.

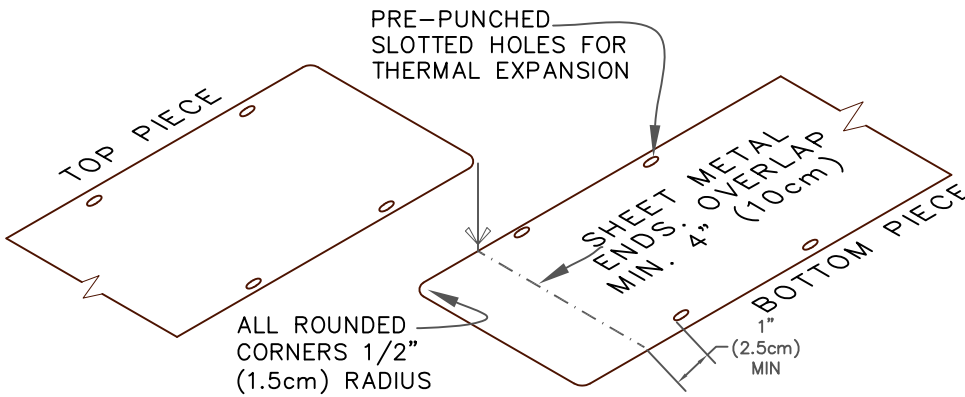

TIE-IN: EPDM MEMBRANE INTO EXISTING ACCEPTABLE ROOF WITH METAL DECK

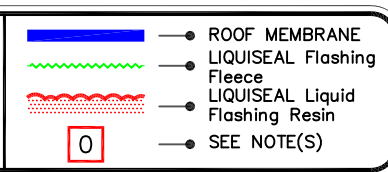

LIQUID FLASHING
LF-13.1