



GUIDELINES FOR ROOF PERIMETER ZONES FOR MECHANICALLY ATTACHED ROOF SYSTEM

PERIMETER ZONES


SPLIT LEVEL ROOFS

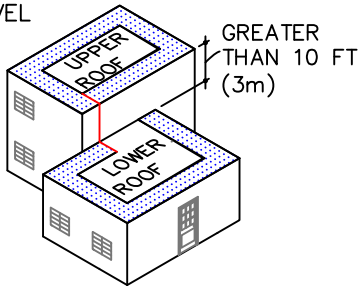

SPLIT LEVEL ROOFS

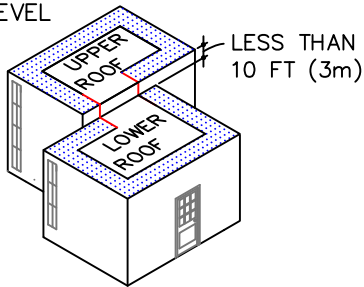


CANOPY ROOF



INSTALL PERIMETER SHEETS OVER THE ENTIRE OVERHANG (PROJECTION ROOF) AREA, EXTENDING ONTO THE MAIN ROOF DECK WHEN AT THE SAME LEVEL AS SHOWN.


LARGE OPENINGS OR LOADING DOCKS

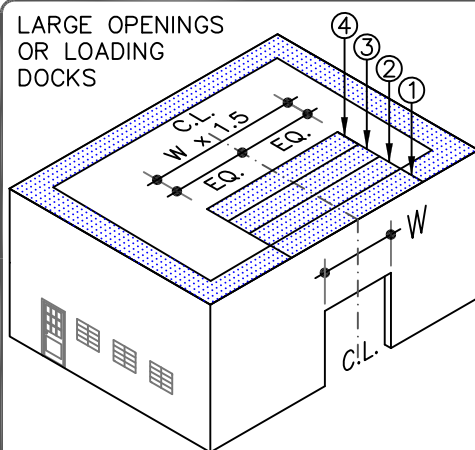

4 PERIMETER SHEETS CENTERED OVER LARGE OPENINGS

8' (2.5m) OR 10' (3m) WIDE FIELD SHEET

9" (23cm) RTS STRIP **3**

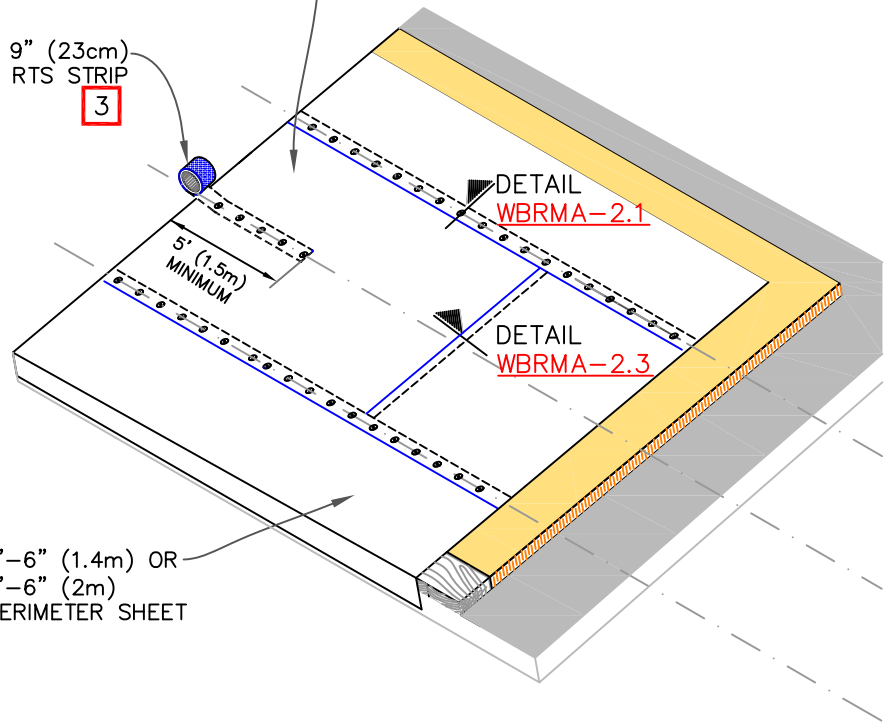

4'-6" (1.4m) OR 6'-6" (2m) PERIMETER SHEET

NOTES:

1. REFER TO WEATHERBOND SPECIFICATIONS FOR REQUIRED NUMBER OF PERIMETER SHEETS, SHEET WIDTH AND MEMBRANE FASTENING DENSITY.
2. HPW FASTENERS AND POLYMER SEAM PLATES ARE REQUIRED OVER STEEL DECKS.
3. RPS "FINGER" MUST EXTEND THE WIDTH OF THE REQUIRED PERIMETER.

