



NOTES:

1. REMOVE ALL LEAD AND OTHER FLASHING BEFORE INSTALLING PEEL & STICK UNCURED EPDM FLASHING.
2. TEMPERATURE OF PIPE MUST NOT EXCEED 180°F (82°C).
3. HPWX FASTENERS AND POLYMER SEAM PLATES ARE REQUIRED OVER STEEL DECKS.
4. FOR STRUCTURAL STEEL TUBING GREATER THAN 12" ACROSS USE [WBRC-5](#) DETAILS.

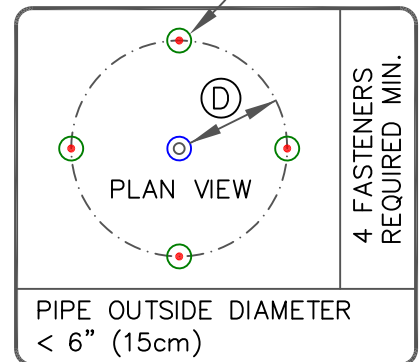

DIMENSIONS		cm	
(A)	1/2"	1.5	
(B)	3"	7.5	
(C)	1"	2.5	
(D)	6"	15	TO
	12"	30	
(E)	12"	30	MAX.

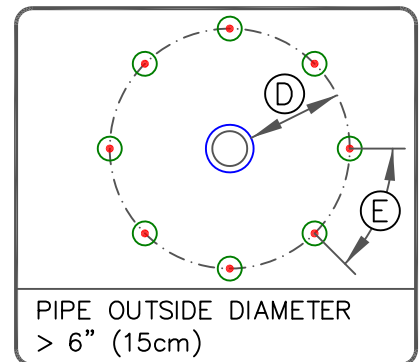

FIELD FABRICATED PIPE SEAL

- REINFORCED EPDM—UNLESS NOTED OTHERWISE
- APPROVED SUBSTRATE
- 0 ● SEE NOTE

MECHANICALLY ATTACHED EPDM

WBRMA-8.2