


CAV-GRIP® III and CAV-GRIP PVC Accessories

Spray Guns & Replacement Tips

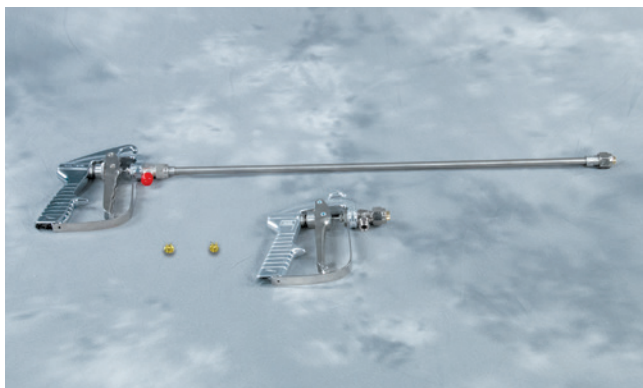

Overview

WeatherBond's CAV-GRIP Spray Gun is an industrial grade spray gun for use with CAV-GRIP III Adhesive/Primer and CAV-GRIP PVC Adhesive. The ergonomic handle makes it easy to apply bonding adhesive to vertical surfaces. The CAV-GRIP Spray Gun should be used to apply CAV-GRIP III and CAV-GRIP PVC to various vertical surfaces. The CAV-GRIP Spray Gun with Extension is designed to be used to apply CAV-GRIP III and CAV-GRIP PVC to horizontal surfaces without the need to bend over.

Note: Avoid cross contamination of CAV-GRIP III Adhesive/Primer and CAV-GRIP PVC Adhesive in spray gun/equipment.

Features and Benefits

- Ergonomic 4-finger trigger and comfortable handle
- Strong aluminum alloy frame
- Interchangeable spray tip
- Durable and reusable

Installation

1. Use the adjustment wheel to close the valve until ready to use
2. Ensure all fittings are tight and leak free
3. Position the gun tip 12 to 14 inches from the surface. This allows for maximum pattern width.
4. Try to hold the gun at a 90 degree angle to the surface by locking your wrist. Try not to move your wrist as that will cause an irregular spray pattern.

5. When you are done spraying, turn the adjustment wheel to the closed position. This will lock the gun.
 6. When you want to resume spraying, turn the adjustment when to the open position. No cleaning should be needed if the hose and gun remain pressurized.
 7. To clean the CAV-GRIP spray gun, turn the cylinder off at the valve. Ensure there is no adhesive left in the hose and gun.* Hook the hose up to a cylinder of Low-VOC UN-TACK™ to clean the system. Turn cylinder off and drain Low-VOC UN-TACK from the hose.
- Note: When cleaning CAV-GRIP III Adhesive/Primer, use Low-VOC UN-TACK. When cleaning CAV-GRIP PVC Adhesive, use CAV-GRIP PVC Low-VOC UN-TACK.
8. Use an adjustable wrench to remove and replace spray tips as necessary.

* CAV-GRIP guns and hoses can be utilized multiple times if maintained properly.

Specifications

Spray Gun

Tip	6501
Spray Angle	65°
GPM	1
Weight	1 lb

Spray Gun with Extension

Tip	9502
Spray Angle	95°
GPM	2
Weight	1.5 lbs

Product Codes

Description	Product Code
Spray Gun	307490
Spray Gun w/ Extension	330912
Replacement Tips	332774



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

CAV-GRIP III and CAV-GRIP PVC Accessories

Hose & Splitter



Overview

Nylon lined with a braided synthetic yarn reinforcement and synthetic rubber cover, the CAV-GRIP Hose should be used in conjunction with CAV-GRIP III/CAV-GRIP PVC and a CAV-GRIP Spray Gun. The CAV-GRIP Hose is available in 6-foot, 12-foot and 18-foot lengths. Two hoses can be attached to one CAV-GRIP III or CAV-GRIP PVC cylinder by using the Splitter.

Note: Avoid cross contamination of CAV-GRIP III Adhesive/Primer and CAV-GRIP PVC Adhesive in hose/spray equipment.

Features and Benefits

- Wide range of operating temperatures
- Low change in length at operating pressure
- Lightweight
- Durable and reusable

Installation

1. Ensure all fittings are tight and leak free.
2. No cleaning should be needed if the hose and gun remain pressurized.
3. To clean the CAV-GRIP spray gun, turn the cylinder off at the valve. Ensure there is no adhesive left in the hose and gun.* Hook the hose up to a cylinder of Low-VOC UN-TACK to clean the system. Turn cylinder off and drain Low-VOC UN-TACK from the hose.
4. Use an adjustable wrench to attach the splitter to the CAV-GRIP cylinder.
5. Attach hoses to both ends of the splitter using an adjustable wrench.

Note: When cleaning CAV-GRIP III Adhesive/Primer, use Low-VOC UN-TACK. When cleaning CAV-GRIP PVC Adhesive, use CAV-GRIP PVC Low-VOC UN-TACK.

* CAV-GRIP guns and hoses can be utilized multiple times if maintained properly.

Specifications

Nominal Bore	0.25"
Nominal O.D.	0.50"
Maximum Working Pressure	750psi
Bend Radius	2.50"

Product Codes

Description	Product Code
6' Hose	304302
12' Hose	304303
18' Hose	304304
Splitter	332680



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

P.O. Box 251 | Plainfield, PA 17081 | 866.471.5125 | FAX: 717.960.4034 | www.weatherbondroofing.com

© 2020 WeatherBond. 08.11.20
WB-10020 - "CAV-GRIP III Adhesive/Primer Accessories Technical Data Bulletin"
WeatherBond is a trademark of WeatherBond. CAV-GRIP and UN-TACK are trademarks of Carlisle Construction Materials, LLC.