


# WeatherBond EPDM

## Peel & Stick Roofing System

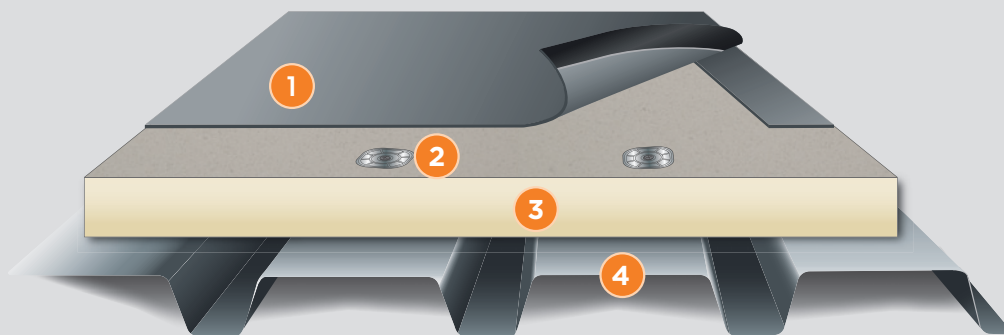

### Typical Application

- 1 WeatherBond PAS EPDM with Peel & Stick Seam Tape
- 2 WeatherBond Fasteners and SecurFast™ or AccuTrac® Plates
- 3 Acceptable Insulation
- 4 Approved Roof Deck

Colors:	Black and White*
Standard Thickness:	60-mil
Standard Width:	10'
Standard Length:	50' and 100'

\*White available in non-reinforced only

### System Features And Benefits:

- Minimize disruption on occupied buildings from the speed of installation and a lack of bonding adhesive odor
- Splices are completed with time tested and trusted WeatherBond Pre-Applied Seam Tape
- Over 60 years of proven EPDM membrane performance
- Industry leading UV and hail resistance
- PAS membrane installs 4.8 times faster completing projects in less time
- Can be installed on steep slopes
- Up to 80% labor savings to help get the job completed quickly
- No fumes or odors to disrupt building occupants

### WeatherBond PAS Non-Reinforced EPDM Membrane

WeatherBond's Peel & Stick (PAS) Non-Reinforced EPDM Membrane is available in Black and White and offers excellent weatherability and hail resistance, provides significant labor savings, and qualifies as a Low-VOC option with no solvent-related odors. WeatherBond PAS EPDM is a nominal 60-mil non-reinforced EPDM membrane laminated to a 100%-solid pressure-sensitive adhesive and is available in 10' x 100' and 10' x 50' (3m x 30m and 3m x 15m) rolls.

### WeatherBond PAS Reinforced EPDM Membrane

WeatherBond's Peel & Stick Reinforced EPDM membrane offers added puncture resistance, significant labor savings, and qualifies as a Low-VOC option with no solvent-related odors. WeatherBond PAS EPDM is a nominal 60-mil reinforced EPDM membrane laminated to a 100%-solid pressure-sensitive adhesive and is available in 10' x 100' and 10' x 50' (3m x 30m and 3m x 15m) rolls. The release liner is silicone-coated on one side for consistent release from the adhesive.

### Installation

WeatherBond Insulation is either mechanically fastened to the roof deck every two square feet, adhered with Flexible DASH Adhesive or other WeatherBond approved insulation adhesive. WeatherBond PAS membrane is adhered to the insulation. Adjoining sheets of EPDM are spliced together a minimum of 3" using WeatherBond's 30-mil Peel & Stick Seam Tape.



**WEATHERBOND**  
ROOFING SYSTEMS

Single-Ply Simplified

	New Construction						Re-roofing		
Existing or New Deck Type	Steel	Plywood or OSB	Lt. Wt. Concrete	Structural Concrete	Wood Planks	Gypsum & Fibrous Cement	Smooth-Surface BUR	Gravel-Surfaced BUR	Existing Single-Ply
Insulation Required	Yes	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Recommended Insulation	WeatherBond Polyiso or Cover Board over Polystyrene								
Insulation Attached By	Flexible DASH Adhesive (non-penetrating) or WeatherBond Fasteners and SecurFast or AccuTrac Plates								
Membrane Attached By	Factory-Applied Self Adhesive								

FOR TEAR OFF OPTIONS REFER TO NEW CONSTRUCTION ABOVE.

For current code approvals, warranties and specifications and details, visit WeatherBond's web site or contact Project Review.

\* Refer to current WeatherBond's Installation Instructions for specific installation requirements.



**WEATHERBOND**  
ROOFING SYSTEMS

Single-Ply Simplified

P.O. Box 251 | Plainfield, PA 17081 | 866.471.5125 | FAX: 717.960.4034 | [www.weatherbondroofing.com](http://www.weatherbondroofing.com)

© 2020 WeatherBond. 09.29.20 WB-13013 - "WeatherBond PAS EPDM System Sheet"  
WeatherBond is a trademark of WeatherBond. SecurFast is a trademark of Carlisle Construction Materials, LLC.  
AccuTrac is a registered trademark of DMG, Inc.