


WeatherBond

Kingspan GreenGuard® LG XPS Insulation Board

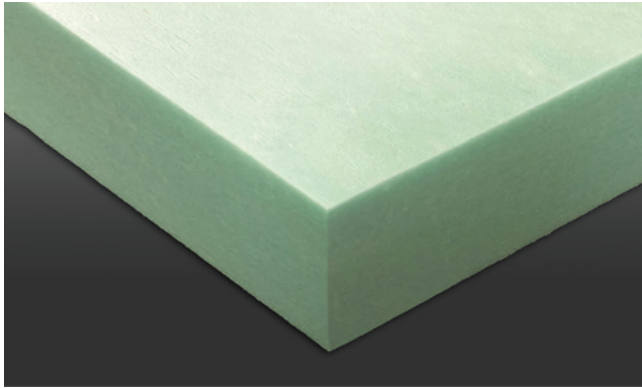

Overview

Kingspan GreenGuard LG XPS is made of closed-cell extruded polystyrene (XPS) and is available in compressive strengths of 25 psi (Type IV), 40 psi (Type VI), and 60 psi (Type VII). It has a formulation resulting in a GWP of less than 50 and is free of regulated HFCs.

Features and Benefits

- Free of regulated HFCs
- GWP of less than 50
- R-value of 5.0 per inch
- High water resistance
- Designed for high-load applications (Type VI and VII)
- Meets ASTM C578 requirements
- JKCFC free

Available Products

- GreenGuard LG Type IV (25 psi)
- GreenGuard LG Type VI (40 psi)
- GreenGuard LG Type VII (60 psi)

Roofing Applications

- Roof Gardens
- Plaza Decks
- Concrete Pavers
- Ballast

Precautions

1. When stored outdoors, product should be protected from exposure to direct sunlight using the original packaging or an opaque, light-colored tarp. Material that has been unwrapped should be covered or rewrapped.
2. **WARNING:** This product is combustible. A thermal barrier is required as specified in the appropriate building code. Protect product from exposure to open flame or other ignition sources during storage and installation. Maximum service temperature is 165°F.

Code Approvals

- UL – See Classification Certificate A183
- Miami-Dade County, FL
- Florida Product Approval – No. FL14164-R



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

Typical Properties and Characteristics

Property	Test Method	Type IV XPS	Type IV XPS	Type IV XPS
Nominal Board Dimensions (ft) ⁴		½, ¾, 1, 1 ½, 2, 2 ½, 3, 4	2, 3	1 ½, 2, 3
Nominal Board Width (ft) ⁴		2, 4	2, 4	2
Nominal Board Length (ft) ⁴		8	8	8
Edge Profile ⁴		Square or Shiplap	Square or DC Board	Square or DC Board
Property Type	ASTM C 578	IV	VI	VII
Compressive Strength (psi)	ASTM D 1621	25	40	60
Water Absorption Max (% by volume)	ASTM C 272	0.1	0.1	0.1
Water Vapor Permeance ² (Perm)	ASTM E 96 Desiccant Method	1.5	<1.0	<1.0
Density Min. (lb./ft ³)	ASTM C 303	1.6	1.8	2.2
Service Temperature (Max °F)		165	165	165
Thermal Resistance, R-value ¹	ASTM C 518	5	5	5
Thermal Conductivity, k-value	ASTM C 518	0.2	0.2	0.2
Flame Spread ³ Smoke Developed ³	ASTM E84 / UL723	15 (Class A) 140	15 (Class A) 140	15 (Class A) 140

¹Specimens were aged and tested in accordance with FTC Rule (16 CFR, Part 460) and ASTM C578.

²Permeance shown is for 1" thick board. Permeance typically decreases as board thickness increases.

³These numerical flame spread and smoke developed ratings are not intended to reflect hazards presented by this material under actual fire conditions. All applicable building codes must be followed.

⁴Not all combinations of thickness, length, width and edge profile are available. Please refer to the Kingspan Insulation LLC Purchase Guide.

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

P.O. Box 251 | Plainfield, PA 17081 | 866.471.5125 | FAX: 717.960.4034 | www.weatherbondroofing.com

© 2021 WeatherBond. 09.21.21 WB-13933 - "Kingspan GreenGuard LG XPS Insulation Board Technical Data Bulletin"
WeatherBond is a trademark of WeatherBond. GreenGuard is a Registered Trademark of the Kingspan Group plc in the US.