


WeatherBond Polyiso

XFP CD (Combustible Deck)

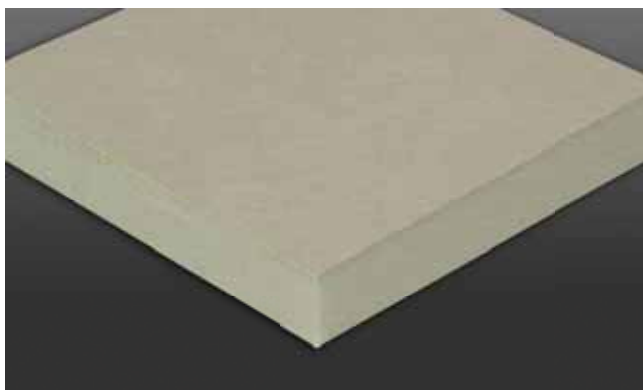

Overview

XFP CD is a rigid roof insulation panel composed of a closed-cell polyisocyanurate foam core manufactured on-line to an extra durable, dimensionally stable coated-glass facer on each surface side.

Features and Benefits

- Achieves a UL Class A combustible deck assembly rating at a 1" thickness without the use of a fire-rated slip sheet or the presence of a gypsum coverboard*
*Maximum roof slope – ½":12"
- Premium facer improves fire resistance, moisture resistance and dimensional stability
- Superior facer adhesion to the foam core
- Highest R-value per inch of commercially available insulation
- Zero ozone-depleting components, CFC-free, HCFC-free, EPA-compliant and nearly zero global warming potential (GWP)

Panel Characteristics

- Available in 4' x 4' (1220 mm x 1220 mm) and 4' x 8' (1220 mm x 2440 mm) panels in a thickness of 1" (25.4 mm)
- 9 lbs per 4' x 8' panel

Thermal Values

Thickness (inches)	Thickness (MM)	LTR R-value	Flute Spanability
1.00"	25.4	5.6	2¾"

Installation

Mechanically Attached Single-Ply Systems

Each XFP CD panel must be secured to the roof deck with fasteners and plates (appropriate to the deck type). Butt edges and stagger joints of adjacent panels. Install the roof membrane according to WeatherBond's installation instructions.

Fully Adhered Single-Ply Systems

Each XFP CD panel must be secured to the roof deck with fasteners and plates (appropriate to the deck type.) Butt edges and stagger joints of adjacent panels. Install the roof membrane according to WeatherBond's installation instructions.

XFP CD 4' x 8' panels can be secured to the roof deck with DASH Adhesives.

REVIEW CURRENT WEATHERBOND INSTALLATION INSTRUCTIONS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Code Approvals

- ASTM-C1289, Type II, Class 2, Grade 2 (20 psi), Grade 3 (25 psi)
- UL Classified for Class A
- International Building Code (IBC) Section 2603

NOTE: Please be aware the Federal Specification HH-1-1972/GEN has been replaced.

Underwriters Laboratories, Inc.

- Insulated metal deck assemblies – UL 1256 (nos. 120, 123, 292)
- Component of Class A roof systems. Built-up, modified bitumen and single-ply (ballasted, mechanically attached and fully adhered) (UL 790)
- XFP classified by ULC – refer to directory of products for details

Precautions

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof material. WeatherBond will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the jobsite or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call WeatherBond for more specific details or refer to PIMA Technical Bulletin No. 109: Storage & Handling Recommendations for Polyiso Roof Insulation.



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

LEED® Information

Pre-consumer Recycled Content	0%
Post-consumer Recycled Content	0%
Manufacturing Location	Puyallup, WA
Energy and Atmosphere	Minimum Energy Performance Optimize Energy Performance
Material and Resources	Construction Waste Management Local and Regional Materials Recycled Content Material Reuse

Typical Properties and Characteristics

Property	Test Method	Value
Compressive Strength	ASTM D1621 ASTM 1289	20 psi* minimum (138 kPa, Grade 2)
Dimensional Stability	ASTM D2126	2% linear change (7 days)
Moisture Vapor Transmission	ASTM E96	< 1 perm (57.5 ng/(Pa•s•m ²))
Water Absorption	ASTM C209	< 1% volume
Service Temperature		-100°F to 250°F (-73°C to 126°C)

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

P.O. Box 251 | Plainfield, PA 17081 | 866.471.5125 | FAX: 717.960.4034 | www.weatherbondroofing.com

© 2017 WeatherBond. 10.30.17
WeatherBond is a trademark of WeatherBond. LEED is a registered trademark of the U.S. Green Building Council.
ENERGY STAR is a registered trademark owned by the US government. **ENERGY STAR qualification is only available in the U.S.