


WeatherBond

SureMB 120TG Base Torch-Grade SBS Base Ply

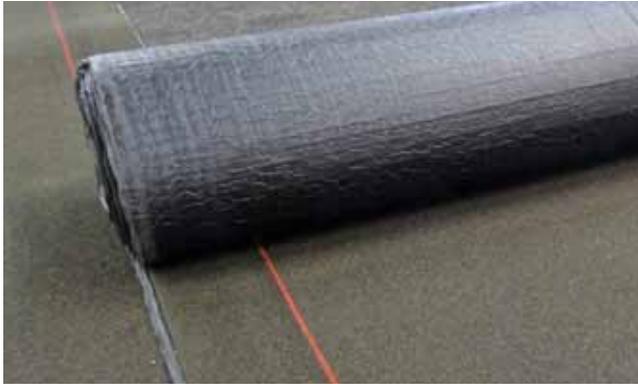

Overview

SureMB 120TG Base is a smooth-surfaced, torch-grade SBS base ply reinforced with a fiberglass reinforcement mat that is saturated and coated with high-quality asphaltic bitumen and SBS elastomers for durability, flexibility and easy maintenance. This product is designed for use as a base ply or inter-ply in WeatherBond's multiple-ply system and may be used as an air barrier, vapor barrier or temporary roof (for up to 60 days).

Features and Benefits

- Torch-applied or mechanically fastened attachment options
- SBS rubber optimizes waterproofing characteristics, adding redundancy to the roofing system
- Fiberglass reinforcement ensures a tough, flexible, puncture-resistant and durable membrane
- Can be used as a base ply, inter-ply, temporary roof or air and vapor barrier
- Eliminates the use of kettles

Installation

1. Suitable substrates are concrete and gypsum cover boards, such as DensDeck® Prime or SECUROCK®. Substrates requiring primer include concrete base plies (self-adhered, mechanically fastened, or adhered) or asphalt.
2. Membrane should overlap 3" on the sides and 6" on the end laps.
3. To align the sheets, unroll the membrane at least 10' and back-roll the membrane so it remains tight.
4. When installing the sheet, apply the torch flame uniformly to the exposed underside of the membrane until the compound has reached the appropriate application temperature. The best visual indication that the compound has reached the proper temperature is when the compound has a slight sheen.
5. Be sure that the burnoff film is completely burned off.
6. End laps must be staggered a minimum of 18" from adjacent end laps.
7. The torch flame should be moved from side to side in the shape of an "L", applying about 80% of the heat to the membrane and 20% to the substrate or underlying base, including the lap area of the previously installed courses. The membrane is unrolled as heat is applied to ensure proper adhesion. During colder temperatures, more heat must be applied to the substrate (refer to precautions section on the following page).
8. A minimum of 3/8" compound flow out must be reached at all seam areas.
9. Seam areas must be rolled in with a standup roller no less than 3' and no more than 4' away from torching application to ensure proper seam adhesion.
10. When completing end laps, pre-heat the surface of the bottom sheet first, and use standard procedures to heat and roll the top membrane.
11. When used as a vapor barrier or temporary roof, options for attaching insulation to 120TG Base include Type III or IV asphalt, cold applied adhesive, WeatherBond's Flexible DASH Adhesive.

REVIEW CURRENT WEATHERBOND INSTALLATION INSTRUCTIONS FOR SPECIFIC INSTALLATION REQUIREMENTS.



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

Precautions

1. Do not install 120TG Base without reviewing and implementing all applicable safety and fire watch requirements.
2. Remove all potentially flammable articles from the roof application area.
3. All roofing application areas should be clean, smooth, dry and prepared according to WeatherBond specifications.
4. Unsuitable substrates include insulations such as polyiso, perlite and wood fiberboard.
5. Other non-acceptable substrates include fresh asphalt glazes, flood coats, solvent-based adhesives or mastics, wood, plywood or oriented strand board.
6. If the membrane produces heavy smoke, this means too much heat is being applied.
7. In colder temperatures, 60% the flame heat should be applied to the membrane and 40% should be applied to the substrate. A slower pace may be necessary to ensure proper heating.

Storage

1. All material should be stored out of the weather in a clean, dry area, in its original unopened packaging, at a minimum of 55°F.
2. If material must be stored temporarily on the roof before application, it must be elevated from the roof's surface on a pallet.
3. Store on end, covered from the weather with a light-colored opaque tarp in a neat, safe manner that does not exceed the allowable load limit of the storage area.
4. Stack 120TG Base squarely in the original unopened packaging, not more than two pallets high.

Specifications

- Width: 39 3/8" (1 m)
- Length: 32' 9" (10 m)
- Thickness: 120-mil (3 mm)
- Weight: 85 lbs/roll (38.5 kg/m²)
- 107 sq. ft./roll
- 20 rolls/pallet

Ratings and Certifications

- Meets ASTM D6163 Type I, Grade S
- UL Classified
- Factory Mutual (FM) Approved

LEED® Information

Pre-consumer Recycled Content	3.2%
Post-consumer Recycled Content	16.7%
Manufacturing Location	Fort Worth, TX
VOC Content	N/A

Typical Properties and Characteristics

Physical Property (ASTM D5147)	Test Results	ASTM D6163 Minimum
Tensile Strength (lbf/in), 0°F, (MD/XMD)	120/110	70 lbf/in
Tensile Strength (lbf/in), 73°F, (MD/XMD)	105/75	30 lbf/in
Elongation (% @ Max Load), 0°F, (MD/XMD)	4%	1%
Elongation (% @ Max Load), 73°F, (MD/XMD)	3%	2%
Elongation (% @ 5%, Max Load), 73°F, (MD/XMD)	5/7	3%
Tear Strength (lbf), (MD/XMD), 73°F, minimum	105/85	35 lbf
Low Temperature Flexibility, (°F), maximum	0°F (-18°C)	0°F
Dimensional Stability, %, maximum	< 0.2%	1%
High Temperature Stability, (°F)	215°F (101°C)	215°F

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product.

Packaging

Product	SureMB 120TG Base Sheet (Torch Grade Modified Base)
Size/Weight	39.38" 33' / 85 lbs
Actual Coverage Rate	100 ft ²
Part Number	323313



WEATHERBOND
ROOFING SYSTEMS

Single-Ply Simplified

P.O. Box 251 | Plainfield, PA 17081 | 866.471.5125 | FAX: 717.960.4034 | www.weatherbondroofing.com

WB-8013 - "SureMB 120TG Base Technical Data Bulletin" © 2020 WeatherBond. 02.26.20
WeatherBond is a trademark of WeatherBond. LEED is a registered trademark of the U.S. Green Building Council.
DensDeck is a registered trademark of Georgia-Pacific. SECURROCK is a registered trademark of USG Corporation.